## **SIEMENS**

Data sheet 3SB3000-2DA11

Selector switch, 22 mm, round, Plastic, Black, Selector switch, short, 3 switch positions I-O-II, Latching, Actuating angle 2x50 degrees, With holder !!! Phased-out product !!! Successor is SIRIUS ACT 3SU1 Preferred successor type is >>3SU1002-2BL10-0AA0 + 3SU1500-0AA10-0AA0<

	>>3SU1002-2BL10-0AA0 + 3SU1500-0AA10-0AA0<<		
product brand name	SIRIUS		
design of the product	Single device round		
Enclosure			
number of command points	1		
Actuator			
design of the actuating element	selector switch		
principle of operation of the actuating element	latching		
product extension optional light source	No		
color of the actuating element	black		
material of the actuating element	plastic		
outer diameter of the actuating element	28.5 mm		
type of unlocking device	rotate-to-unlatch mechanism		
number of switching positions	3		
actuating angle			
• clockwise	50°		
anticlockwise	50°		
Front ring			
product component front ring	Yes		
design of the front ring	Standard		
material of the front ring	plastic		
color of the front ring	black		
Holder			
material of the holder	Plastic		
General technical data			
product function			
EMERGENCY OFF function	No		
EMERGENCY STOP function	No		
protection class IP	IP66		
vibration resistance according to IEC 60068-2-6	20 200 Hz: 5g		
operating frequency maximum	1 000 1/h		
mechanical service life (operating cycles) typical	300 000		
reference code according to IEC 81346-2	S .		
Substance Prohibitance (Date)			
	07/01/2006		
Connections/ Terminals	07/01/2006		
tightening torque of the screws in the bracket	07/01/2006 1 1.2 N·m		
tightening torque of the screws in the bracket Ambient conditions			
tightening torque of the screws in the bracket  Ambient conditions  ambient temperature	1 1.2 N·m		
tightening torque of the screws in the bracket  Ambient conditions  ambient temperature  • during operation	1 1.2 N·m -25 +70 °C		
tightening torque of the screws in the bracket  Ambient conditions  ambient temperature  • during operation  • during storage	1 1.2 N·m		
tightening torque of the screws in the bracket  Ambient conditions  ambient temperature  • during operation	1 1.2 N·m -25 +70 °C -40 +80 °C		
tightening torque of the screws in the bracket  Ambient conditions  ambient temperature  • during operation • during storage  environmental category during operation according to IEC 60721  Installation/ mounting/ dimensions	1 1.2 N·m  -25 +70 °C -40 +80 °C 3K6		
tightening torque of the screws in the bracket  Ambient conditions  ambient temperature  • during operation  • during storage  environmental category during operation according to IEC 60721	1 1.2 N·m -25 +70 °C -40 +80 °C		
tightening torque of the screws in the bracket  Ambient conditions  ambient temperature  • during operation  • during storage  environmental category during operation according to IEC 60721  Installation/ mounting/ dimensions  fastening method  shape of the installation opening	1 1.2 N·m  -25 +70 °C -40 +80 °C 3K6		
tightening torque of the screws in the bracket  Ambient conditions  ambient temperature  • during operation • during storage environmental category during operation according to IEC 60721  Installation/ mounting/ dimensions fastening method	1 1.2 N·m  -25 +70 °C -40 +80 °C 3K6  front mounting		
tightening torque of the screws in the bracket  Ambient conditions  ambient temperature  • during operation  • during storage  environmental category during operation according to IEC 60721  Installation/ mounting/ dimensions  fastening method  shape of the installation opening  mounting diameter  mounting height	1 1.2 N·m  -25 +70 °C -40 +80 °C 3K6  front mounting round		
tightening torque of the screws in the bracket  Ambient conditions  ambient temperature  • during operation • during storage environmental category during operation according to IEC 60721  Installation/ mounting/ dimensions fastening method shape of the installation opening mounting diameter mounting height installation width	1 1.2 N·m  -25 +70 °C -40 +80 °C  3K6  front mounting round 22 mm		
tightening torque of the screws in the bracket  Ambient conditions  ambient temperature  • during operation  • during storage  environmental category during operation according to IEC 60721  Installation/ mounting/ dimensions  fastening method  shape of the installation opening  mounting diameter  mounting height	1 1.2 N·m  -25 +70 °C -40 +80 °C  3K6  front mounting round 22 mm 24 mm		













other

**Miscellaneous** 

Confirmation

## **Further information**

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SB3000-2DA11


Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SB3000-2DA11

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3SB3000-2DA11

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3SB3000-2DA11&lang=en

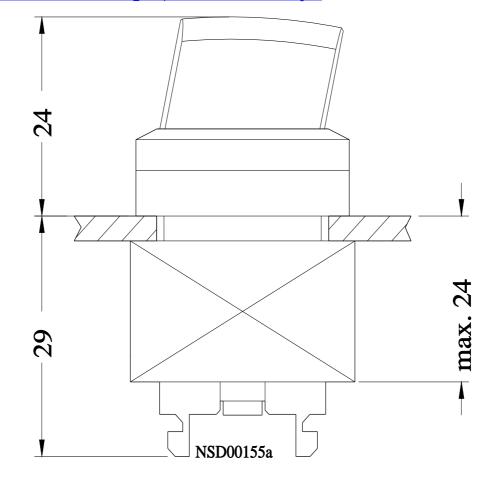

last modified:

11/4/2023



3SB30 Page 3	 2DA	.11