


## Cordset Part Number Key

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.

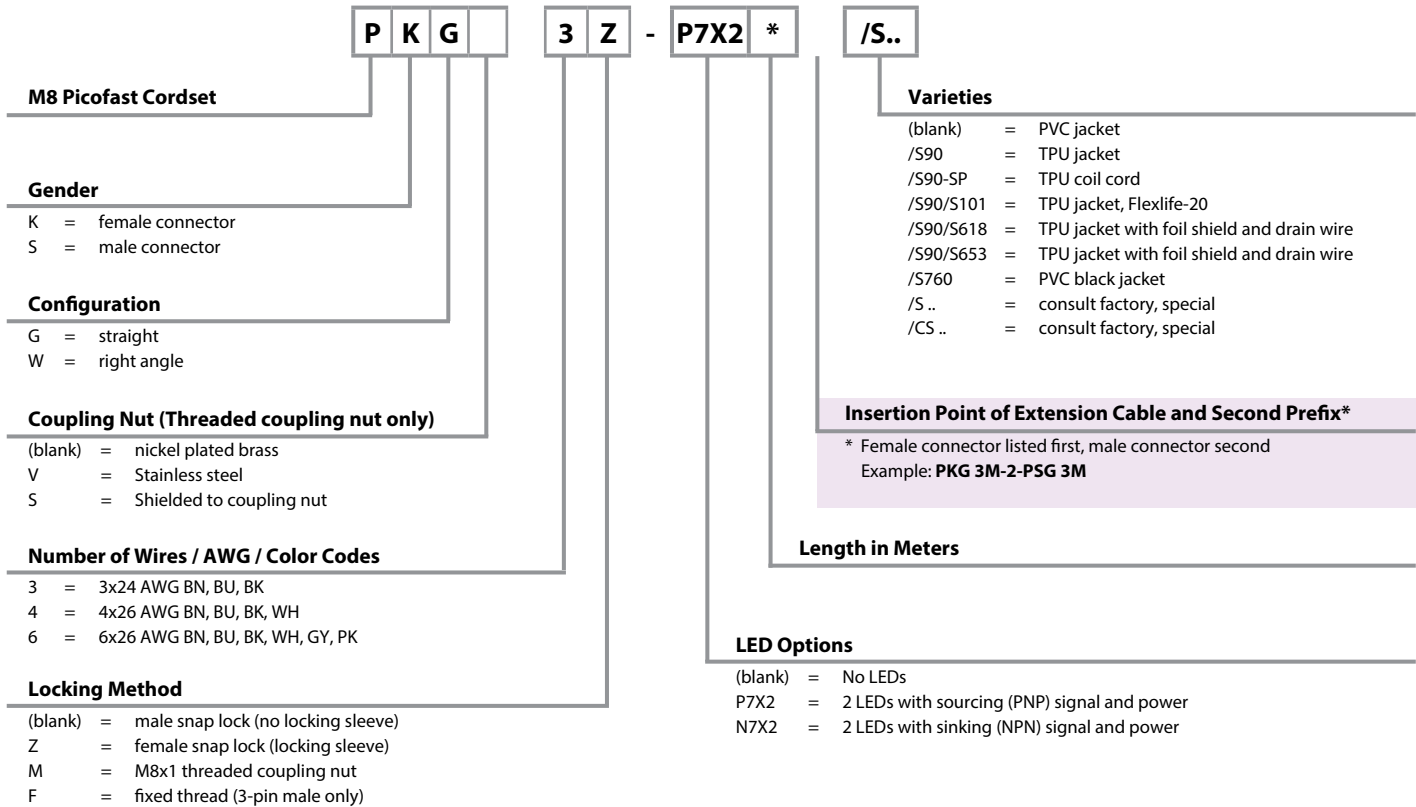


### Extension Examples:


Hybrid connector extensions also available. Consult factory.

### Extension Examples:


Hybrid connector extensions also available. Consult factory.



PKG 3M - 2 - PSG 3M

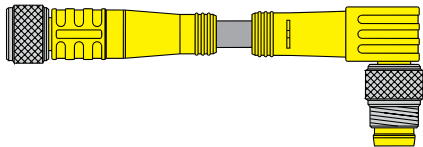

PKG 3M - 2 - PSW 3M



PKW 3M - 2 - PSG 3M



RK 4.4 T - 2 - PKG 4M

## 3-Wire Cordsets, Threaded Coupling Nut

- NEMA 1, 3, 4, 6P
- IEC IP67 Protection
- 125 V, 4 A



Cordsets

Connector Style	Female Part Number	Male Part Number	Features	Pinout
<p><b>PKG ..Z**</b></p>	<p><b>PKG 3M-*</b> <b>PKW 3M-*</b></p>	<p><b>PSG 3M-*</b> <b>PSW 3M-*</b></p>	<p>AWM, PVC Yellow, 3x24 AWG, 105 °C, 4.4 mm OD, Cable #RF50642-*M, Flexlife®</p>	<p><b>Female</b></p> <p>1. BN 3. BU 4. BK</p>
<p><b>PKG 3M-*/S90</b> <b>PKW 3M-*/S90</b></p>	<p><b>PSG 3M-*/S90</b> <b>PSW 3M-*/S90</b></p>	<p>AWM, TPU Black, 3x24 AWG, 90 °C, 4.2 mm OD, Cable #RF50587-*M, Cut/Abrasion Immune</p>		
<p><b>PKG 3M-*/S90/S101</b> <b>PKW 3M-*/S90/S101</b></p>	<p><b>PSG 3M-*/S90/S101</b> <b>PSW 3M-*/S90/S101</b></p>	<p>AWM, TPU Black, 3x24 AWG, 90 °C, 4.4 mm OD, Cable #RF51166-*M, Cut/Abrasion Immune, Flexlife-20, High Flex - Over 20 Million Cycles</p>		
<p><b>PKG 3M-*/S90/S618</b> <b>PKW 3M-*/S90/S618</b></p>	<p><b>PSG 3M-*/S90/S618</b> <b>PSW 3M-*/S90/S618</b></p>	<p>AWM, TPU Black, 3x24 AWG, 90 °C, 4.2 mm OD, Cable #RF50601-*M, Cut/Abrasion Immune, EMI/RFI Protection</p>	<p><b>Male</b></p> <p>1. BN 3. BU 4. Drain</p>	
<p><b>PKG 3M-*/S1587</b> <b>PKW 3M-*/S1587</b></p>	<p><b>PSG 3M-*/S1587</b> <b>PSW 3M-*/S1587</b></p>	<p>AWM, TPE Yellow, 3x24 AWG, 105 °C, 4.4 mm OD, Cable #RF51271-*M, Weldlife®, Weld Flash Immune</p>		
<p><b>PKG 3M-*/S760</b> <b>PKW 3M-*/S760</b></p>	<p><b>PSG 3M-*/S760</b> <b>PSW 3M-*/S760</b></p>	<p>AWM, PVC Black, 3x24 AWG, 4.2 mm OD, Cable #RF50585-M, Flexlife</p>		
<p><b>PKG 3M-*/S90/S1084</b> <b>PKW 3M-*/S90/S1084</b></p>	<p><b>PSG 3M-*/S90/S1084</b> <b>PSW 3M-*/S90/S1084</b></p>	<p>AWM, TPU Black, 2x24 AWG, 90 °C, 4.2 mm OD, Cable #RF51197-*M, Cut/Abrasion Immune, Shielded</p>	<p>1. BN 3. BU 4. BK</p>	
<p><b>PKG 3F..**</b></p>	<p><b>PSG 3F-*</b></p>	<p>AWM, PVC Yellow, 3x24 AWG, 105 °C, 4.4 mm OD, Cable #RF50642-*M, Fixed coupling nut</p>		

\* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters.

\*\* Standard coupling material is nickel plated brass..\*PKG..M\*;\*PKG.V..M\* indicates stainless steel.

We reserve the right to make technical alterations without prior notice.

## 4-Wire Cordsets, Threaded Coupling Nut

- NEMA 1, 3, 4, 6P
- IEC IP67 Protection
- 125 V, 4 A



Connector Style	Female Part Number	Male Part Number	Features	Pinout
<p><b>PKG ..M**</b></p>	<b>PKG 4M-*</b> <b>PKW 4M-*</b>	<b>PSG 4M-*</b> <b>PSW 4M-*</b>	AWM PVC Yellow, 4x26 AWG, 105 °C, 4.4 mm OD, Cable #RF50697-*M, Flexlife®	
<p><b>PKW ..M**</b></p>	<b>PKG 4M-*/S90</b> <b>PKW 4M-*/S90</b>	<b>PSG 4M-*/S90</b> <b>PSW 4M-*/S90</b>	AWM TPU Black, 4x26 AWG, 90 °C, 4.2 mm OD, Cable #RF50586-*M, Cut/Abrasion Immune	<p><b>Female</b></p>
<p><b>PKG ..M**</b></p>	<b>PKG 4M-*/S90/S101</b> <b>PKW 4M-*/S90/S101</b>	<b>PSG 4M-*/S90/S101</b> <b>PSW 4M-*/S90/S101</b>	AWM TPU Black, 4x26 AWG, 90 °C, 4.4 mm OD, Cable #RF50935-*M, Cut/Abrasion Immune, Flexlife-20, High Flex - Over 20 Million Cycles	
<p><b>PSG ..M**</b></p>	<b>PKG 4M-*/S90/S618</b> <b>PKW 4M-*/S90/S618</b>	<b>PSG 4M-*/S90/S618</b> <b>PSW 4M-*/S90/S618</b>	AWM TPU Black, 4x26 AWG, 90 °C, 4.2 mm OD, Cable #RF50602-*M, Cut/Abrasion Immune, EMI/RFI Protection	<p>1. BN 2. WH 3. BU 4. BK</p>
<p><b>PSW ..M**</b></p>	<b>PKG 4M-*/S760</b> <b>PKW 4M-*/S760</b>	<b>PSG 4M-*/S760</b> <b>PSW 4M-*/S760</b>	AWM PVC Black, 4x26 AWG, 105 °C, 4.4 mm OD, Cable #RF50870-*M, Flexlife	<p><b>Male</b></p>
<p><b>PKG ..M**</b></p>	<b>PKG 4M-*/S90/S653</b> <b>PKW 4M-*/S90/S653</b>	<b>PSG 4M-*/S90/S653</b> <b>PSW 4M-*/S90/S653</b>	AWM TPU Black, 3x24 AWG, 90 °C, 4.2 mm OD, Cable #RF50601-*M, Cut/Abrasion Immune, EMI/RFI Protection	

We reserve the right to make technical alterations without prior notice.

\* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters.  
 \*\* Standard coupling material is nickel plated brass. "PKG..M"; "PKG..M" indicates stainless steel.