


SPECIFICATIONS					
CONTACT CARRIER MATERIAL	NYLON OR TPU				
MOLDED MATERIAL/COLOR	TPU/YELLOW				
CONTACT MATERIAL/PLATING	BRASS/GOLD				
COUPLING NUT MATERIAL/PLATING	BRASS/BRASS				
RATED CURRENT [A]	4.0 A				
RATED VOLTAGE [V]	250 V				
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW				
CONDUCTOR INSULATION MATERIAL	PVC				
NUMBER OF CONDUCTORS [AWG]	4x22 AWG				
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)				
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K				

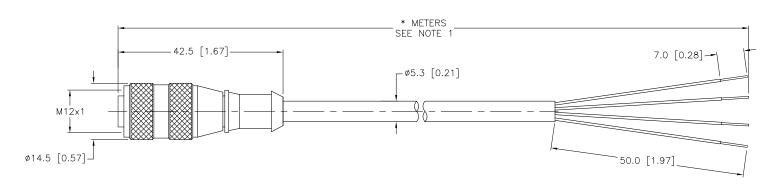

CABLE LENGTH	TOLERANCE + 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER		
ALL LENGTHS			
STRIP LENGTH	TOLERANCE		
0-7mm	±0.5mm		
8-29mm	±1.0mm		
30-49mm	±2.0mm		
50-69mm	±3.0mm		
70-100mm	±4.0mm		
OVER 100mm	±5.0mm		

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

- 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- 2. "/SV" DESIGNATES CUSTOM PACKAGING FOR VENDING MACHINES.

	UPDATE CABLE OD PER ECO	TR	01/06/12	37147
V	DESCRIPTION	BY	DATE	ECO NO.

	1. 2. 3. 4.	PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	High Technology	3000 CAMPUS MINNEAPOLIS, MI 1-800-544- (763) 553- (763) 553-0 turck.com	LIS, MN 55441 -544-7769 553-7300 553-0708 fax					
	MATERIAL		DRFT DJW	DATE 04/02/07	DESCRIPTION DIZ 4 4 7 T	* / () /					
	SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	APVD	SCALE 1=1.0	RK 4.43T-	- "/ SV					
		DRAWING ARE FOR REFERENCE ONLY	UNIT OF ME	UNIT OF ME	UNIT OF ME	UNIT OF MEA	UNIT OF MEASUREM	ASUREMENT	IDENTIFICATION NO		557
	FINISH		NAU NAE-TE		IDENTIFICATION NO.		REV				
		CONTACT TURCK FOR MORE	MILLIMETE	ER [INCH]			l F I				
7	SEE SPECIFICATIONS	INFORMATION									
Э.		1	DO NOT SCALE	THIS DRAWING	FILE: 777007709	SHEET	1 OF 1				