


ELO 4 ELO 140					
SPECIFICATIONS					
TPU					
TPU/YELLOW					
BRASS/GOLD					
BRASS/NICKEL					
4.0 A					
250 V					
CPE/YELLOW					
EPDM					
4x18 AWG					
-50°C to +105°C (-58°F to 221°F)					
MEETS NEMA 1,3,4,6P AND IEC IP68					

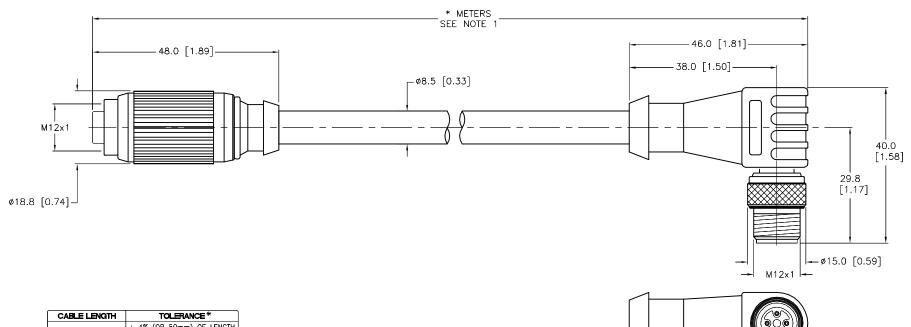

CABLE LENGTH	TOLERANCE *			
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER			
STRIP LENGTH	TOLERANCE*			
0-7mm	±0.5mm			
8-29mm	±1.0mm			
30-49mm	±2.0mm			
50-69mm	±3.0mm			
70-100mm	±4.0mm			
OVER 100mm	±5.0mm			
* UNLESS OTHERWISE SPECIFIED				

NOTES:

- 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- 2. "/S600" DESIGNATES HEAVY DUTY RUBBER JACKET AND CONDUTOR INSULATION.

П	DRAWING PROCESSED AS PART OF ECO 33971	СВМ	04/06/11	33971
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS		
1. 2.	_	PROPER	TY OF TURCK JSE OF THIS	
3.		DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		
4.	, i		OHIBITED.	
MATERIAL		DRFT	JBJ	
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	APVD		

FINISH

SEE SPECIFICATIONS

DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION

DOCUMENT WITHOUT
WRITTEN PERMISSION IS
PROHIBITED. DRFT DATE 06/26/01 JBJ SCALE 1=1.0 APVD UNIT OF MEASUREMENT

RKG 4.4T-*-WSE 4.4T/S600

SOURCE DRAWING - FOR REFERENCE ONLY

IDENTIFICATION NO. MILLIMETER [INCH] FILE: 777000136 DO NOT SCALE THIS DRAWING

REV

3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300

(763) 553-0708 fax

SHEET 1 OF 1

www.turck.us