


SPECIFICATIONS						
CONTACT CARRIER MATERIAL	NYLON OR TPU					
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW					
CONTACT MATERIAL/PLATING	BRASS/GOLD					
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL					
RATED CURRENT [A]	4.0 A					
RATED VOLTAGE [V]	250 V					
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW					
CONDUCTOR INSULATION MATERIAL	PVC					
NUMBER OF CONDUCTORS [AWG]	3x22 AWG					
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)					
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K					

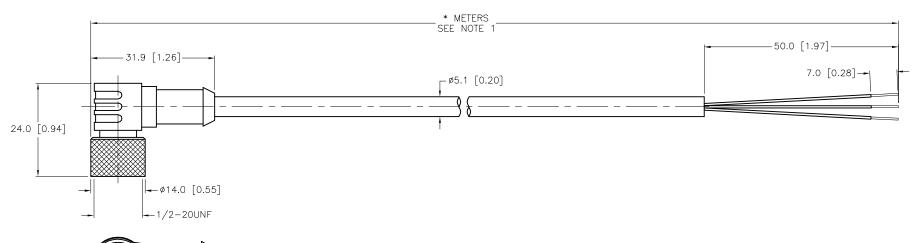

CABLE LENGTH	TOLERANCE*							
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER							
STRIP LENGTH	TOLERANCE *							
0-7mm	±0.5mm ±1.0mm							
8-29mm								
30-49mm	±2.0mm							
50-69mm	±3.0mm							
70-100mm	±4.0mm							
OVER 100mm	±5.0mm							
* UNLESS OTHERWISE SPECIFIED								

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.			RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	WRITTEN PERMISSION IS PROHIBITED.		RC	MINNEAPO 1-800- (763) (763)	MPUS DRIVE LIS, MN 55441 -544-7769 553-7300 553-0708 fax .turck.us		
		MATERIAL		DRFT JBJ	DATE 12/18/00	DESCRIPTION WKB 3T-*					
		SEE SPECIFICATIONS		APVD	SCALE 1=1.0	, , , , , , , , , , , , , , , , , , ,					
				UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV			
				MILLIMETER [INCH]				l F l			
E	UPDATED GRN CONDUCTOR TO GRN/YEL PER ECO	TV	09/08/17	60438	SEE SPECIFICATIONS	INFORMATION					
REV	DESCRIPTION	BY	DATE	ECO NO.			DO NOT SCAL	E THIS DRAWING	FILE: 777000166		SHEET 1 OF 1