


SPECIFICATIONS	
CONTACT CARRIER MATERIAL	TPU
MOLDED HEAD MATERIAL/COLOR	TPU/BLUE-GRAY
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	300 V
CABLE JACKET MATERIAL/COLOR	PVC/GRAY
CONDUCTOR INSULATION MATERIAL	PE (DATA), PVC (POWER)
NUMBER OF CONDUCTORS [AWG]	4x22 AWG, 22 AWG DRAIN
SHIELDING	FOIL (PAIRS), FOIL (OVERALL)
TEMPERATURE RATING	-40°C to +80°C (-40°F to +176°F)
PROTECTION CLASS	NEMA 1,3,4,6P,12 & IECIP67, IP68,IP69,IP69K

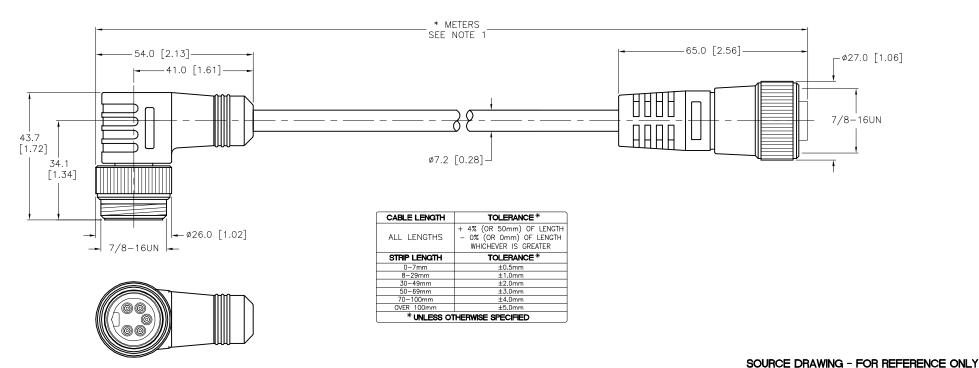

3RD ANGLE PROJECTION RELATED DOCUMENTS THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 2. (763) 553-7300 DOCUMENT WITHOUT 3. WRITTEN PERMISSION IS (763) 553-0708 fax PROHIBITED. www.turck.us DATE 08/25/09 MATERIAL DRFT DESCRIPTION RDS NOTES: WSM RKM 572-*M ALL DIMENSIONS APVD SCALE SEE SPECIFICATIONS DISPLAYED ON THIS DRAWING ARE FOR 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC UNIT OF MEASUREMENT LENGTHS. REFERENCE ONLY IDENTIFICATION NO. REV FINISH MILLIMETER [INCH] CONTACT TURCK FOR MORE UPDATE PROTECTION CLASS CBM 04/13/21 76628 SEE SPECIFICATIONS INFORMATION REV DESCRIPTION DATE ECO NO. DO NOT SCALE THIS DRAWING FILE: 777007320 SHEET 1 OF 1