

### Basic features

Approval/Conformity	CE cURus WEEE
---------------------	---------------------

### Environmental conditions

Ambient temperature	-25...80 °C
IP rating	IP67

### Electrical connection

Connection 1	M12x1-Male, 5-pin, A-coded
Connection 2	M12x1-Female, 4-pin, A-coded
Connection 3	M12x1-Female, 4-pin, A-coded
Number of pins	5/4/4

### Material

Material contacts	Copper alloy, gold plated/Copper alloy, gold plated/Copper alloy, gold plated
Material cover nut	Brass nickel-plated
Material grip	PA 6.6 GF

### Electrical data

Operating voltage $U_b$	125 VDC / 125 VAC
Rated current (40 °C)	4.0 A


### Mechanical data

Tightening torque pigtail	0.6 Nm/-/-
---------------------------	------------

### Remarks

Enclosure rating per IEC 60529, only in screwed state with the associated mating piece.

### Connector Drawings

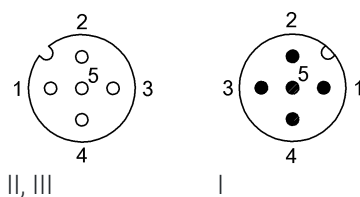

## Wiring Diagrams

