JIULONG MOTOR

G8025HA2BL-7P



尺寸 Size: 80mm×80mm×25mm


风量 Airflow: 19-23CFM

噪音 Noise: 23-26dB(A)


风叶 Impeller Material: PBT UL94-V0 Reinforced Plastic

外框 Frame: Aluminum Alloy 端子 Terminals: 0.5mm

引线 Lead Wire: AWG#22 UL 1569(Optional) 马达 Motor: Shaded Pole Induction Motor 温度范围 Operating Temperature: -10℃~+65℃

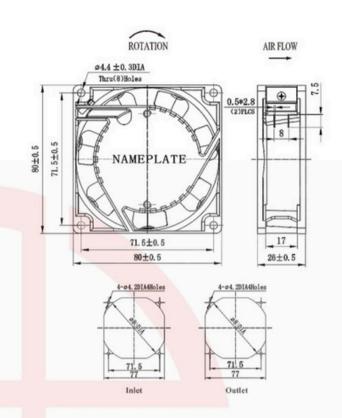

产品型号 Model	轴承型式 Bearing System	电压 Voltage VAC	频率 Freq. Hz	电流 Current A	功率 Power W	转速 Speed RPM	噪 音 Noise dB(A)	风量 Air Flow CFM	相 数 Phase	电容 Capacitor µF/VAC
G8025HA,S	Sleeve	100/125	50/60	0.2/0.16	15/12	2500/3000	26/23	19/23	1	/
G8025HA ₂ S		200/240	50/60	0.11/0.09	15/12	2500/3000	26/23	19/23	1	/
G8025HA,B	Ball	100/125	50/60	0.15	15/12	2300/2750	26/23	19/23	1	/
G8025HA,B		200/240	50/60	0.09	15/12	2300/2750	26/23	19/23	1	/



Fan Accessories













